



Yuasa Technisches Datenblatt

Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung 12V
 Kapazität 20 Std (vorgegeben) 80Ah
 Kaltstartstrom (A) EN1 800A

Abmessungen

Länge 317mm
 Breite 175mm
 Höhe 190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 23.2kg



Gehäuseeigenschaften

Gehäusotyp L4 DIN AGM
 Batteriehalter B3
 Tragegriffe ✓
 Entgasung ✓
 Semi Traktionseigenschaften ✓
 Deckeltyp VRLA

Technologie

Flammschutz ✓
 Technologie Ca/Ca VRLA
 Adskiller AGMSORTIMENT
 VDA Überschlagtest ✓
 Empfohlener Ladestrom 5A
 Performance Marking W5-C2-V3-M3

Anschlusspol Typ

T1


Standard DIN Post




Positive Terminal

Negative Terminal

Zellenanordnung

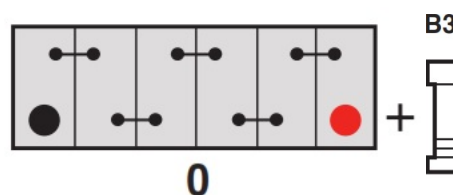

Batteriehalter

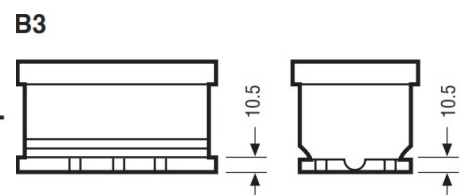

Datenblatt erstellt am 15/05/2024 - E&EO



Yuasa Technical Data Sheet

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	80Ah
Cold Cranking Amps (EN1)	800A

Dimensions

Length	317mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	23.2kg
-----------------------	--------



Container Features

Case Type	L4 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
VDA Roll Over Test	AGM
Recommended Charge Rate	✓
Performance Marking	5A
	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post

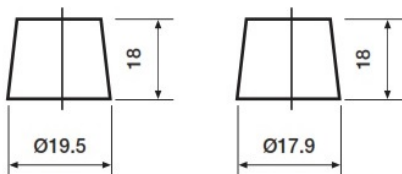


Positive Terminal

Negative Terminal

Cell Assembly Layout

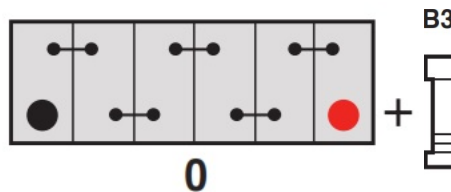

Battery Hold-down

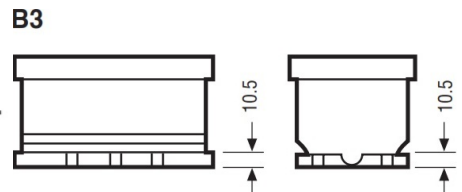

Data Sheet generated on 15/05/2024 - E&OE

