



Yuasa Technisches Datenblatt

Yuasa YBX9012 - YBX9000 AGM Start Stop Plus Batterien

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	50Ah
Kaltstartstrom (A) EN1	520A

Abmessungen

Länge	207mm
Breite	175mm
Höhe	190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure	15.9kg
--	--------



Gehäuseeigenschaften

Gehäusotyp	L1 DIN AGM
Batteriehalter	B3
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	✓
Deckeltyp	VRLA

Technologie

Flammschutz Technologie	✓
Adskiller	Ca/Ca VRLA
VDA Überschlagentest	AGMSORTIMENT
Empfohlener Ladestrom	✓
Performance Marking	3A
	W5-C2-V3-M3

Anschlusspol Typ

T1


Standard DIN Post



Positive Terminal

Negative Terminal


Zellenanordnung

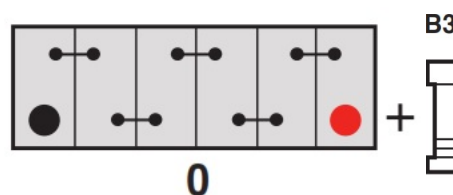

0

Batteriehalter

B3

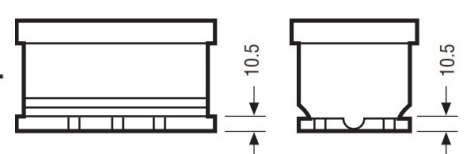

Datenblatt erstellt am 15/05/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX9012 - YBX9000 AGM Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	50Ah
Cold Cranking Amps (EN1)	520A

Dimensions

Length	207mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	15.9kg
-----------------------	--------



Container Features

Case Type	L1 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA

Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA AGM
VDA Roll Over Test	✓
Recommended Charge Rate	3A
Performance Marking	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post




Positive Terminal

Negative Terminal

Cell Assembly Layout

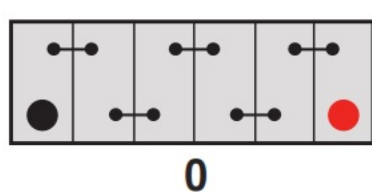

Battery Hold-down

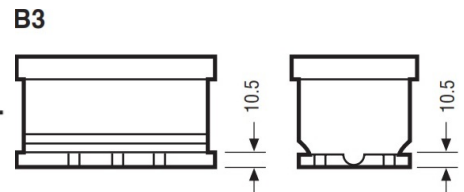

Data Sheet generated on 15/05/2024 - E&OE